




INSTALLATION GUIDE

# Construction Cover Removal

Condeck

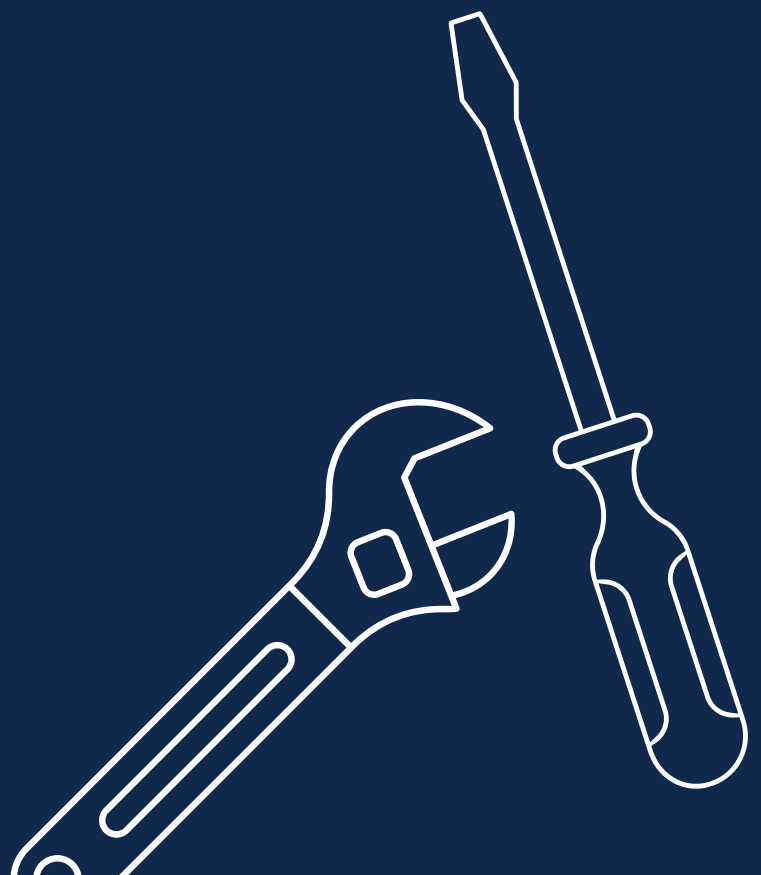

# Construction Cover Removal Guide

## Condeck

### Prior to removal

Pool cover removal can only be carried out once there has been a certified pool or temporary fence installed around your Plungie. Pool fencing regulations and safety standards are to be confirmed with your local council. Please note, Council may issue on-the-spot fines for pool fencing not complying with the standards.

Take care not to drop anything into the pool throughout this process, as any impact may cause damage to the ecoFINISH waterproof membrane and void warranty.

### Safety Warning

Ensure gloves are worn at all times during removal as the construction cover has sharp edges.


Each panel weighs approximately 10Kg, lift only to your limits.

### You will need:

- » Protective Gloves
- » Adjustable Wrench (M20 or M24 Bolts)
- » Small Hand Drill - Hex and Phillips Head

### Downloads:

- » Construction Cover Engineering
- » Construction Cover Form 15

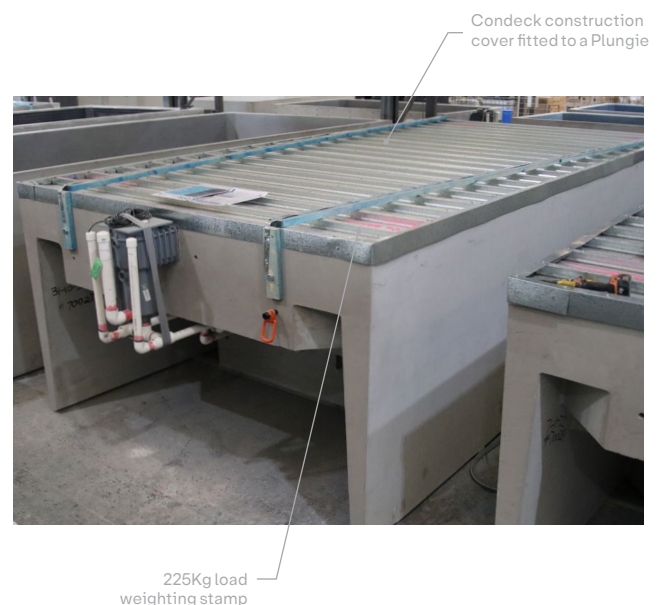

### Step 1: Remove screws

Ensure you are wearing gloves and unscrew and remove the following:

- » Builders strap
- » Flashing around edge
- » Stitching screws holding panels together

### Step 2: Take care

Once stitching screws are removed, care should be taken to stay off the cover.

### Step 3: Remove cover

- » When removing your cover, do not drag or pull the panels across the pool.
- » Remove one piece at a time, tilting to crack the joining seal and lift vertically.
- » Remove each section and stack for storage or disposal.

### Step 4: Re-use or recycle

- » Condeck construction panels can be 100% recycled or re-used.
- » Re-use panels or dispose of responsibly.